
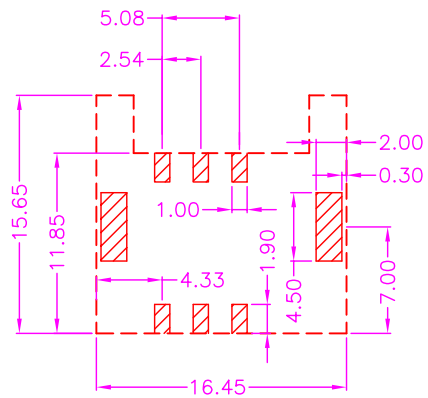

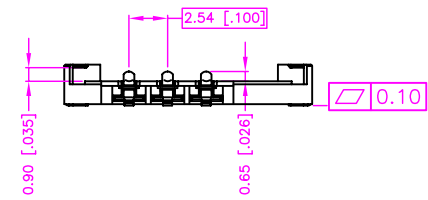



H	04'0835	Aug 18, 2004	REV	DESCRIPTION	DATE
J	04'1110	Nov 04, 2004	—	RELEASE	Aug 22, 2003
K	05'0435	Apr 12, 2005	B	03'0910	Sep 11, 2003
L	05'1014	Oct 11, 2005	C	03'0912	Sep 15, 2003
M	06'0212	Feb 11, 2006	D	03'0931	Sep 20, 2003
N	08'0526	May 15, 2008	E	04'0251	Mar 02, 2004
P	08'0720	Jul 04, 2008	F	04'0332	Mar 17, 2004
			G	04'0342	Mar 24, 2004

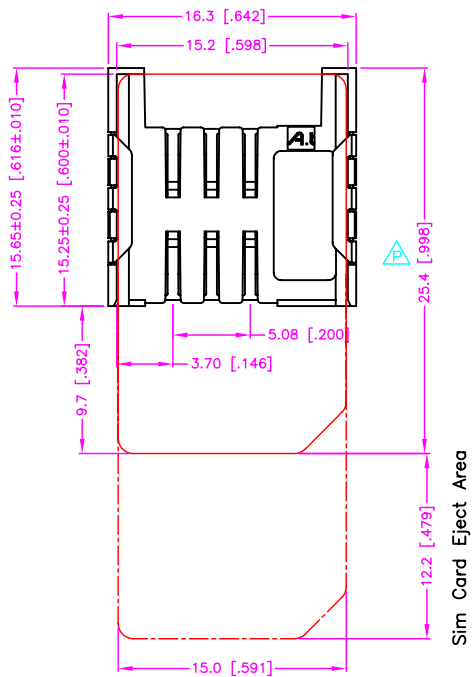

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW


MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
- TERMINAL : COPPER ALLOY.(t=0.15mm)
GOLD PLATED OVER NICKEL
- FORK : COPPER ALLOY. (t=0.20mm)
TIN PLATED OVER NICKEL

SPECIFICATION

- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.



△ PART NUMBER INFORMATION :

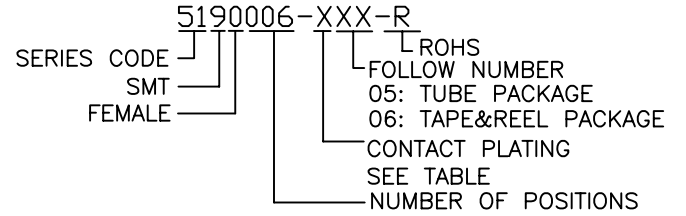


5190006-606-R	30u"	TAPE PACKAGE	TOLERANCE		DRAWER		 ASTRON TECHNOLOGY CORP.
5190006-605-R	30u"	TUBE PACKAGE	.0±.25 [.010]		Victor		
5190006-306-R	15u"	TAPE PACKAGE	.00±.15 [.006]		CHECK		NAME
5190006-305-R	15u"	TUBE PACKAGE	.000±.05 [.002]		Chu		
5190006-206-R	10u"	TAPE PACKAGE	ANG.=±3'		APP'D		SIM CARD 2.54PH(ROHS)
5190006-205-R	10u"	TUBE PACKAGE			Dunken		
5190006-006-R	GOLD FLASH	TAPE PACKAGE	UNITS : mm [inch]		PRODUCT SPEC.		DRAW NO.
5190006-005-R	GOLD FLASH	TUBE PACKAGE					
PART NO.	CONTACT PLATING	PACKING	SCALE	SIZE	SHEET	REV.	R5190006-X05(06)
			NONE	A4	1 OF 2	P	

H	04'0835	Aug 18, 2004	REV	DESCRIPTION	DATE
J	04'1110	Nov 04, 2004	—	RELEASE	Aug 22, 2003
K	05'0435	Apr 12, 2005	B	03'0910	Sep 11, 2003
L	05'1014	Oct 11, 2005	C	03'0912	Sep 15, 2003
M	06'0212	Feb 11, 2006	D	03'0931	Sep 20, 2003
N	08'0526	May 15, 2008	E	04'0251	Mar 02, 2004
P	08'0720	Jul 04, 2008	F	04'0332	Mar 17, 2004
			G	04'0342	Mar 24, 2004

PULL OUT DIRECTION →

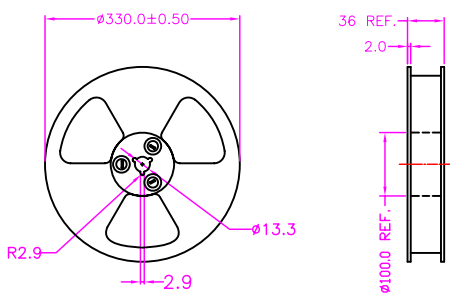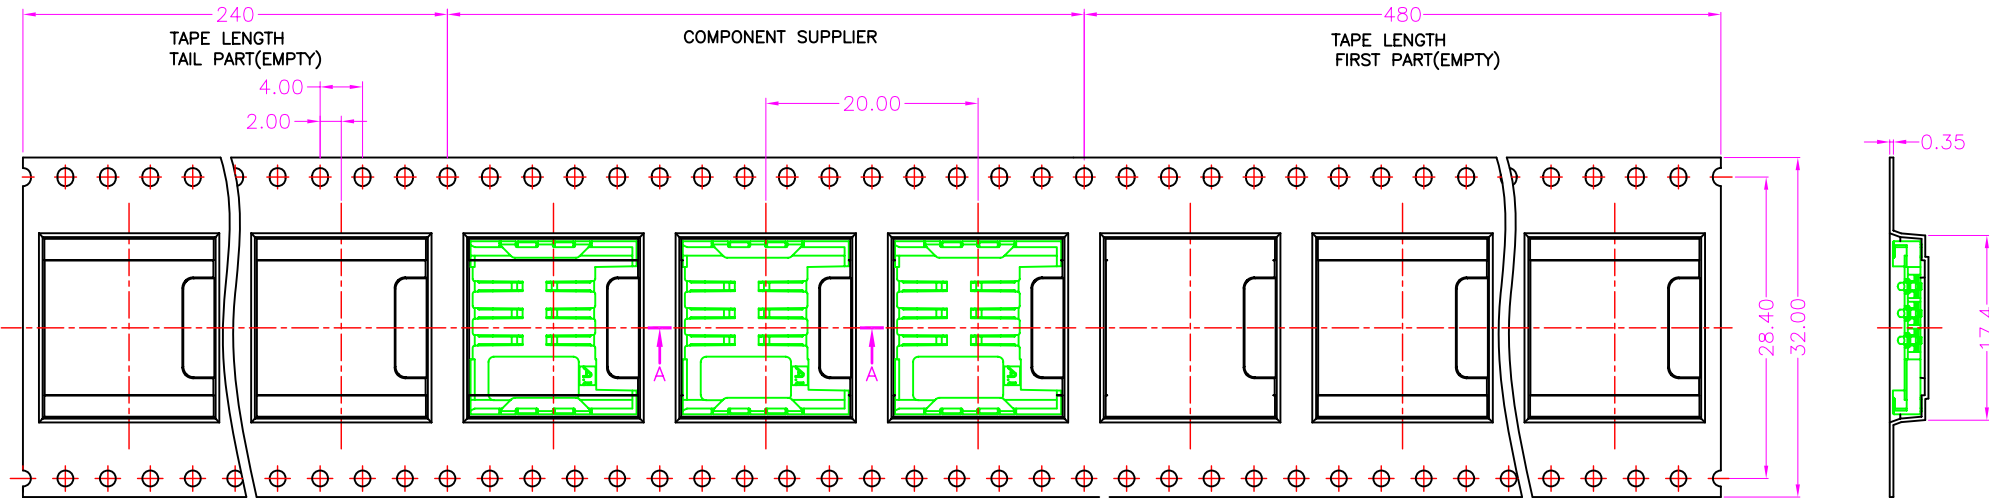


REEL FOR CARRIER TAPE

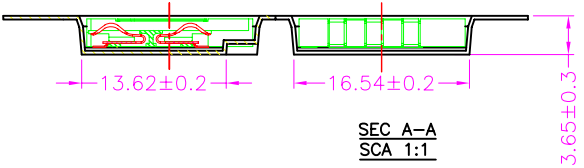

SEC A-A
SCA 1:1

PULL OUT DIRECTION →

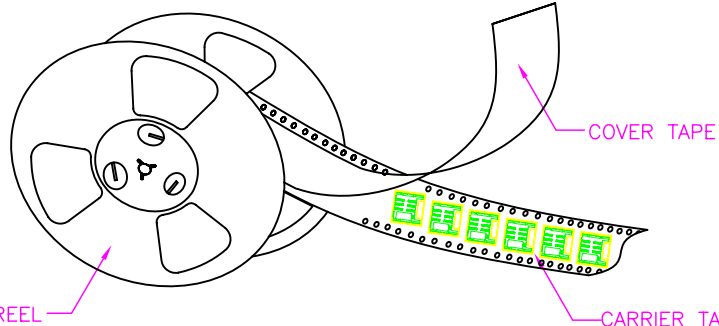

TAPE & REEL PACKAGE :

- MATERIALS**
- CARRIER TAPE: POLYSTYREN (PS)
 - COVER TAPE: POLYSTYREN (PS)
 - REEL: POLYSTYREN (PS)
- QUANTITY**
- 1000PCS PER REEL
 - 8 REEL PER CARTON(8000PCS PER CARTON)

TOLERANCE .0=±0.30 .00=±0.10 .000=±0.05 ANG.=±3°	DRAWER <i>Victor</i>	ASTRON TECHNOLOGY CORP.
	CHECK <i>Chu</i>	
UNITS : mm [inch]	APP'D <i>Dunken</i>	DRAW NO. R5190006-X05(06)
	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	SHEET 2 OF 2
	REV. P	