

REV.	DESCRIPTION	DATE
A	RELEASE	Nov 15, 2005
B	05'1232	Dec 16, 2005
C	05'1244	Dec 22, 2005
D	06'0121	Jan 16, 2006
E	06'0229	Feb 20, 2006
F	06'0514	May 08, 2006
G	06'121B	Dec 12, 2006
H	07'0501	May 05, 2007

ORDER INFORMATION :

5190008-XXX-R

SERIES CODE: SMT
 FEMALE
 NUMBER OF POSITIONS: 10



ROHS
 FOLLOW NUMBER
 09: TUBE PACKAGE
 10: TAPE&REEL PACKAGE
 CONTACT PLATING
 0: GOLD FLASH
 3: GOLD 15u"

MATERIALS:

- HOUSING : HI-TEMP. PLASTIC (UL 94V-0),BLACK.
- TERMINAL : COPPER ALLOY(T=0.15mm).
GOLD PLATED OVER NICKEL.
- SHELL : STAINLESS STEEL(T=0.15mm).
NICKEL PLATED OVERALL.

SPECIFICATION




- CURRENT RATING : 0.5 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- CONTACT RESISTANCE :30mΩ MAX.
- INSULATION RESISTANCE : 1000 MΩ MIN. AT 500V DC.
- OPERATING TEMPERATURE : -25°C TO +85°C.

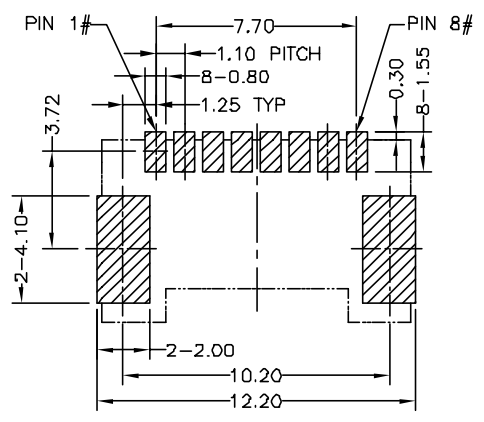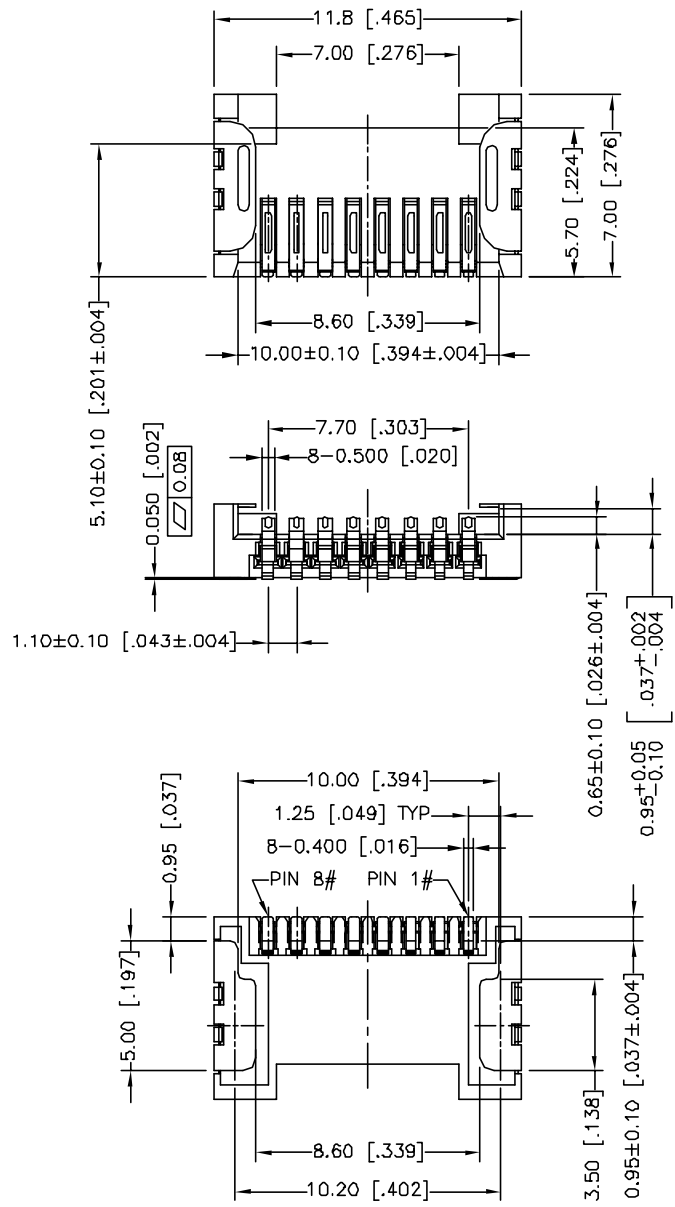



PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	Data Line[bit2]
2	CD/DAT3 ²	I/O/PP ³	Card Detect/Data Line[bit3]
3	CMD	PP	Command/Response
4	V _{DD}	S	Supply Voltage
5	CLK	I	Clock
6	V _{SS}	S	Supply Voltage Ground
7	DAT0	I/O/PP	Data Line[bit0]
8	DAT1	I/O/PP	Data Line[bit1]


TOLERANCE .0=±0.25[.010] .00=±0.15[.006] .000=±0.05[.002] ANG.=±3°		DRAWER <i>gun</i>		Astron ASTRON TECHNOLOGY CORP. NAME T-FLASH CARD CONN DRAW NO. R5190008-X09(10)-R
UNITS : mm [inch]		CHECK <i>Eric</i>		
SCALE NONE	SIZE A4	APP'D <i>Dunkern</i>		
SHEET 1 OF 3		REV. H		PRODUCT SPEC. ---

REV.	DESCRIPTION	DATE
A	RELEASE	Nov 15, 2005
B	05'1232	Dec 16, 2005
C	05'1244	Dec 22, 2005
D	06'D121	Jan 16, 2006
E	06'D229	Feb 20, 2006
F	06'D514	May 08, 2006
G	06'1218	Dec 12, 2006
H	07'0501	May 05, 2007



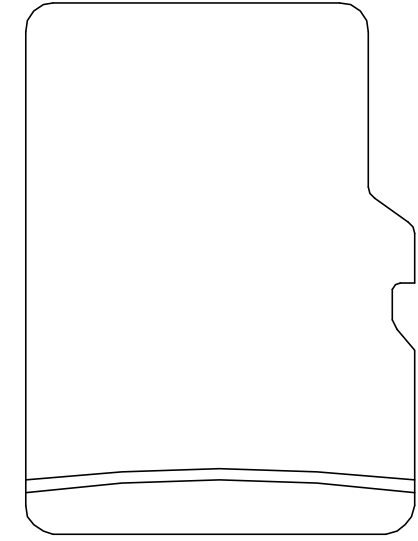
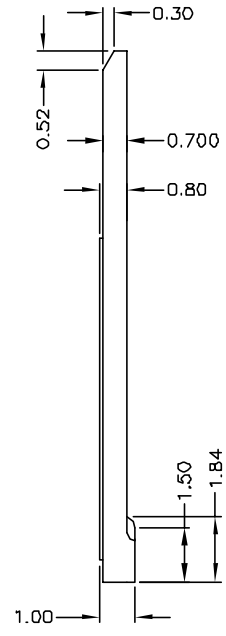
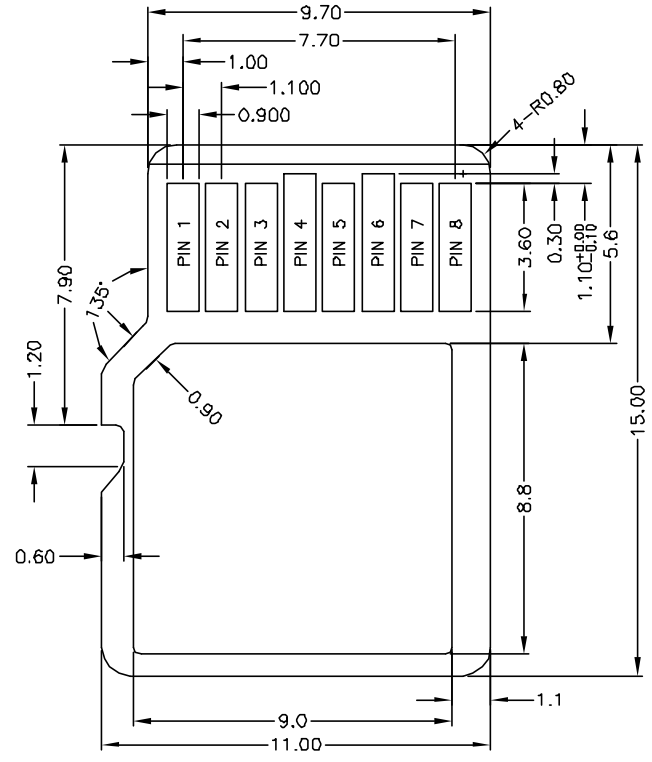


T-FLASH CARD DIMENSION

TOLERANCE .0=±0.20 .00=±0.10 .000=±0.05 ANG.=±3°		DRAWER <i>yun</i>	 ASTRON TECHNOLOGY CORP.
 UNITS : mm [inch]		CHECK <i>Eric</i>	
SCALE NONE	SIZE A4	APP'D <i>Dunken</i>	DRAW NO. R5190008-X09(10)-R
		PRODUCT SPEC. _____	REV. H

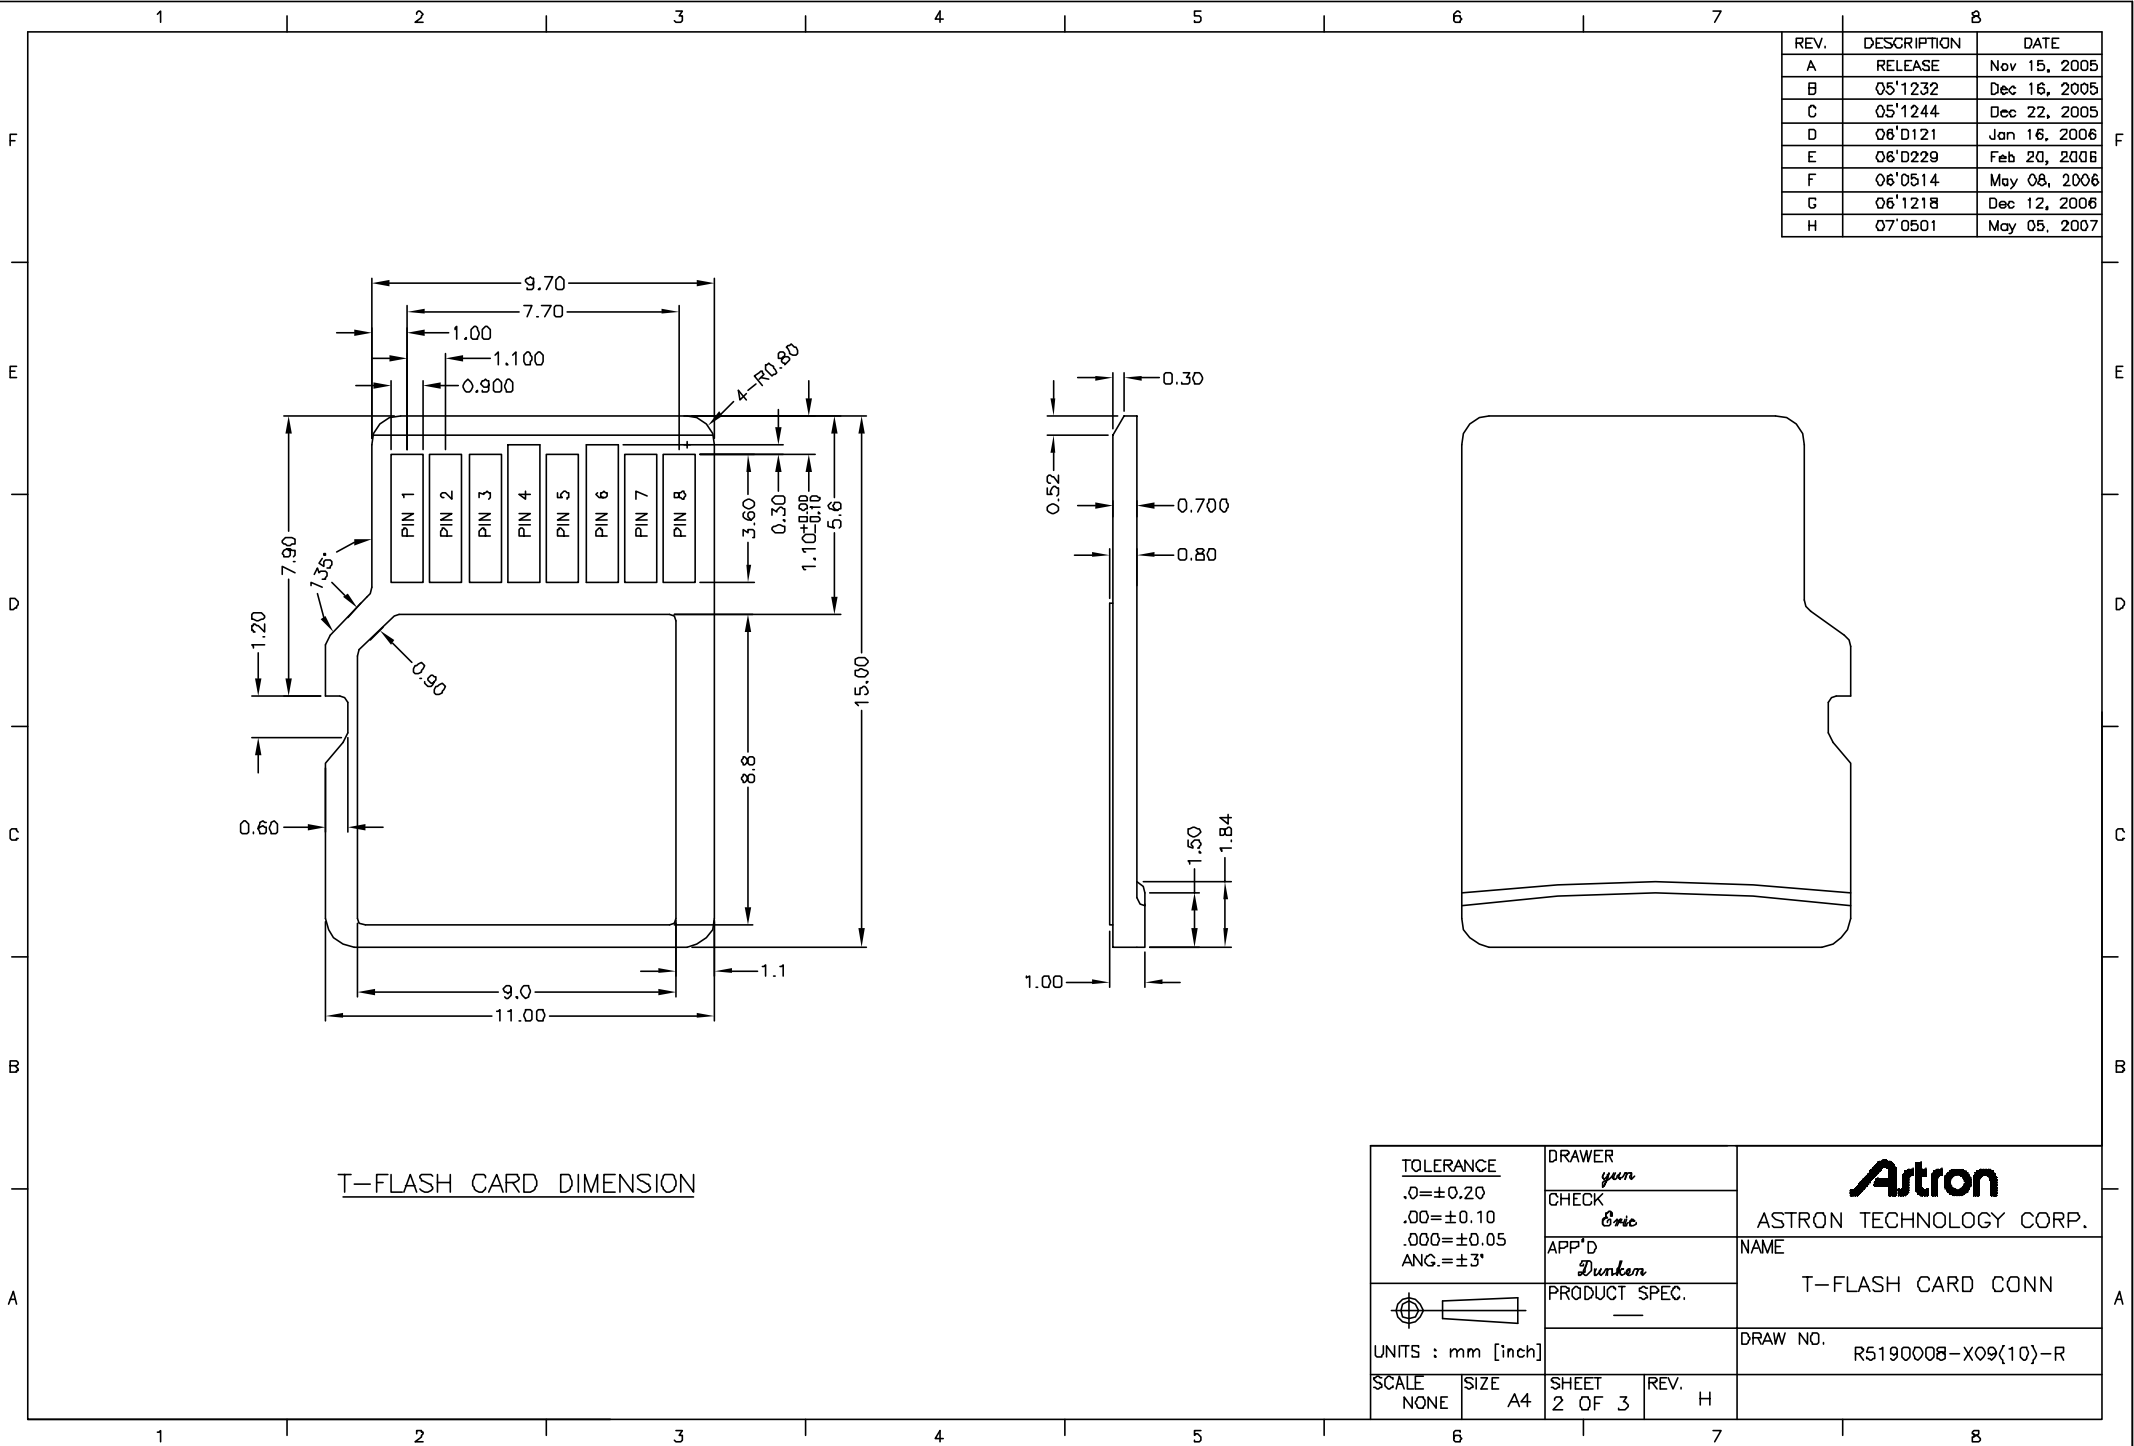

REV.	DESCRIPTION	DATE
A	RELEASE	Nov 15, 2005
B	05'1232	Dec 16, 2005
C	05'1244	Dec 22, 2005
D	06'0121	Jan 16, 2006
E	06'0229	Feb 20, 2006
F	06'0514	May 08, 2006
G	06'1218	Dec 12, 2006
H	07'0501	May 05, 2007

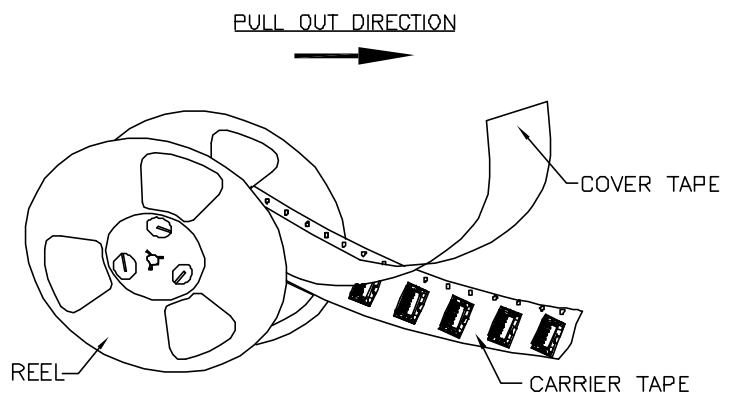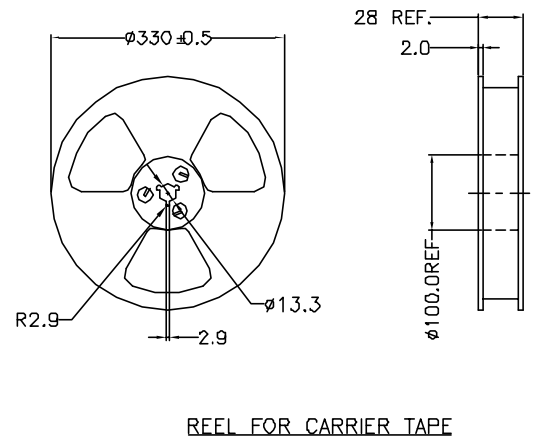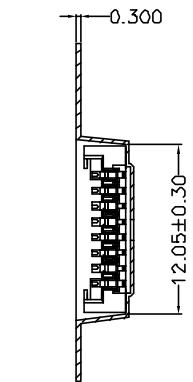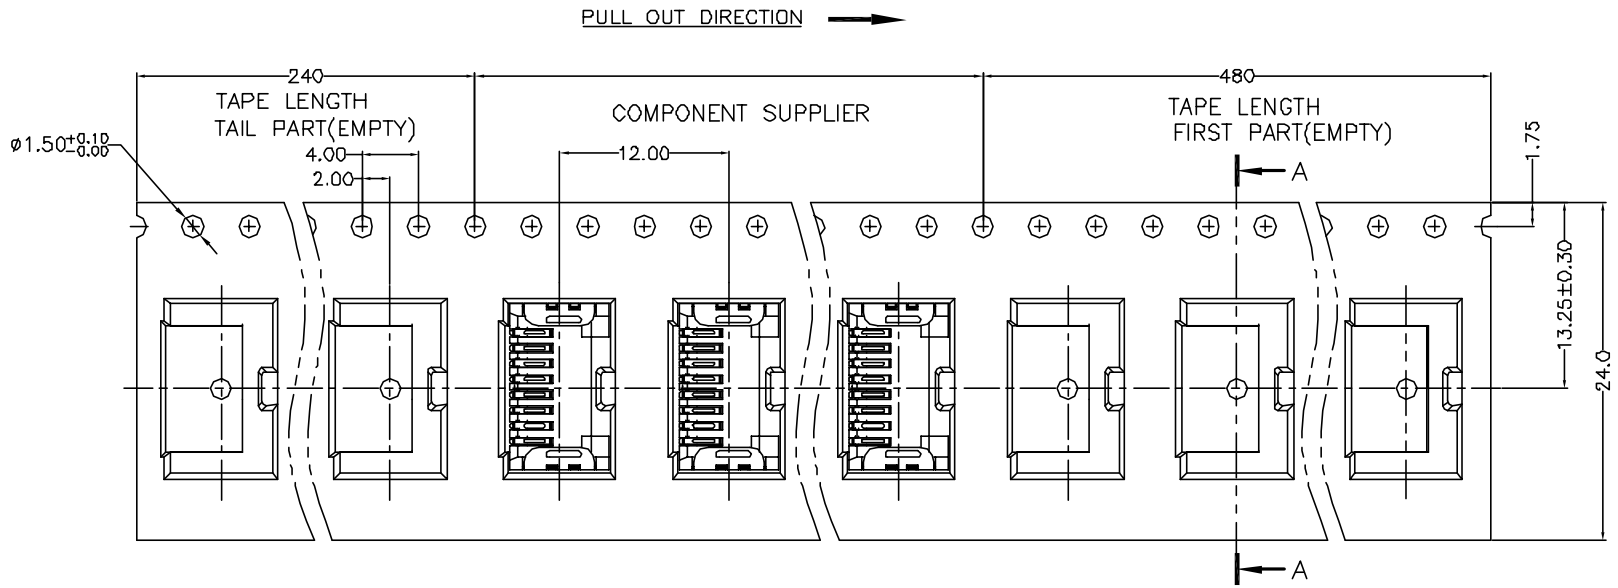

TAPE & REEL PACKAGE :

MATERIALS

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

1. 1200 PCS PER REEL
2. 10 REEL PER CARTON(12000 PCS PER CARTON)

TOLERANCE .0 = ±0.30 .00 = ±0.10 .000 = ±0.05 ANG. = ±3°	DRAWER <i>yan</i>	 Astron ASTRON TECHNOLOGY CORP.	
	CHECK <i>Eric</i>		NAME T-FLASH CARD CONN
APP'D <i>Dunkan</i>	PRODUCT SPEC. —		DRAW NO. R5190008-X09(10)-R
UNITS : mm SCALE NONE SIZE A4	SHEET 3 OF 3 REV. H		